
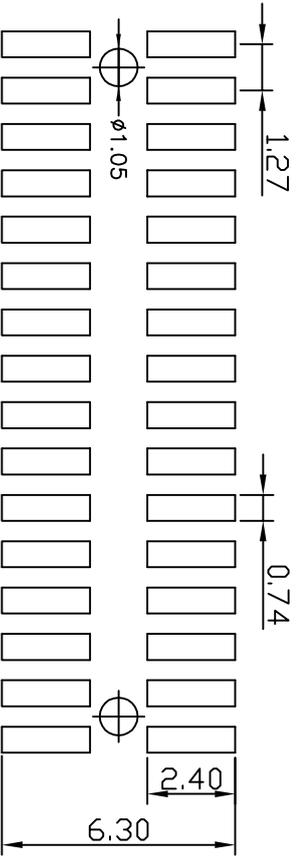

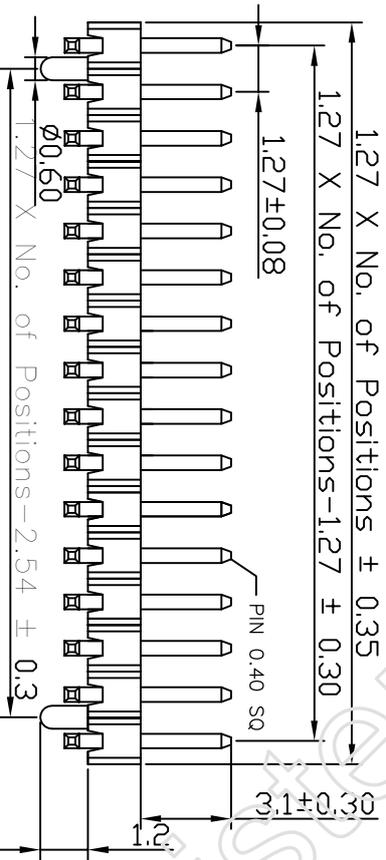


1.27mm Pin Header, Dual Row, S.M.T

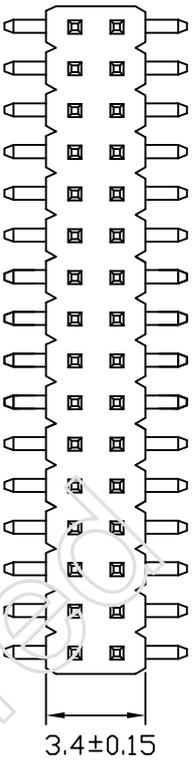

PCB LAYOUT

SPECIFICATIONS

- Current Rating : 1AMP
- Operation Temperature: -40° C to +105° C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage : AC 500V

PART NO: 2PH-3155-S□□

表示PIN脚排2-50

REV	ECN NO.	OR DESCRIPTION	REVISED	DATE

B	CONTACT	4-100	Brass	Au or Sn Over 50μr Ni
A	HOUSING	1	Polyester(DUL94V-D) Standard PA6T	BLACK
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.35	TITLE PH1.27*1.0双排1=6, 4/5, 5(0.2)/3.1 SMT带定位柱		
.X	:±0.25	DWN	JACK	PART NO: 2PH-3155-S□□
.XX	:±0.20	CHKD	SCALE:	UNIT: mm
.XXX	:±0.15	APVD	SIZE: A3	SHEET: 1 OF 1 REV: A
CUSTOMER COPY				