

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05


REV.	EGN.NO.	MODIFY/CONTENT	DATE
A		NEW	2012/04/13

NOTES:

1. MATERIAL:
 - 1.1 HOUSING:THERMOPLASTIC FLAMMABILITY RATING UL94-0
 - 1.2 CONTACT:COPPERY ALLOY T=0.15MM
 - 1.3 SHELL: COPPERY ALLOY T=0.25MM
2. FINISH:
 - 2.1 CONTACT:
 - 3U"MIN,PLATED ON CONTACT AREA
 - G/F PLATING ON SOLDER TAIL AREA
 - 50~80U" NICKEL UNDERPLATING OVERALL
 - 2.2 SHELL:
 - 80~120U" MATTER TIN PLATING ALL
 - 50~80U" NICKEL UNDERPLATING OVERALL
3. SPECIFICATION:
 - 3.3 CURRENT RATING:0.5A(2.3.4CONTACT)/1.8A (1.5CONTACT)MAX.
 - 3.2 VOLTAGE:30 VAC
 - 3.3 TEMPERATURE RANGE:-30C~85C
 - 3.4 CONTACT RESISTANCE:30 MILLIONHM MAX.
 - 3.5 DIELECTRIC WITHSTANDING VOLTAGE:250VAC R.M.S
 - 3.6 INSULATION RESISTNACE:100 MEGOHMS MIN

GENERAL TOLERANCE	DWG NO.	APPD:	WIND	Scale
X:±0.45	JYSA0413-02	CHKD:		1:1
X±0.35	Title	DR:		mm
XX±0.25	Part NO.	Date		
.XXX±0.15				

Micro USB 5P B TYPE SMT
有柱 带翻边

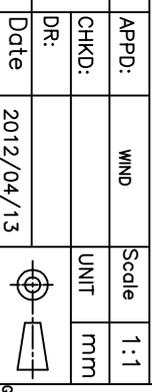

JYSComm

深圳市杰宇森电子有限公司
Shenzhen JieYuSen electronic co., LTD.